


*Keep Your Secrets  
to Yourself*

# Acoustic Panel





## Natural European Oak Veneer & PVC/PP Options Available!

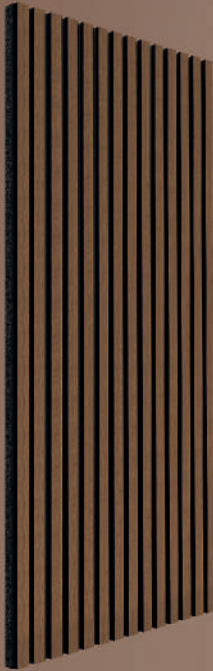

- A level sound insulator acoustic felt.
- B1 level fire retardant acoustic felt.
- Reduces background noises such as echo and howling.
- Oak veneer option matches perfectly with The Madera Series.
- Easy to cut and apply.

Dimensions (mm)	
Width	605
Length	2800
Thickness	22

\*thickness options available

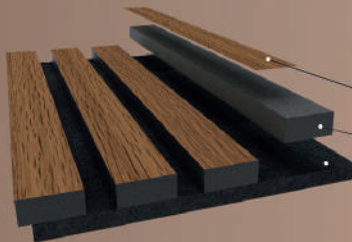

Colección de  
**madera**

0,6 MM NATURAL EUROPEAN OAK  
VENEER / PVC-PP OPTIONS

12 MM BLACK COLORED MDF

9 MM PET ACOUSTIC FELT



## Decorate in 3 Easy Steps

### Measure



Measure the Wall You Want to Apply Acoustic Panels.

### Cut



Cut the Acoustic Panel According to Wall Dimensions.

### Apply



Apply Polyurethane (PU) Assembly Glue to the Back of the Acoustic Panel / Or Use a Nail Gun to Mount it on the Wall.

## ***OAK COLOR COLLECTION***

---



MAP501



MAP502



MAP504



MAP505

## ***PVC / PP COLOR COLLECTION***

---



PAP303



PAP310



PAP312



PAP316



PAP317




PAP1070



\*Other colors may be produced upon request.

## ACOUSTIC FELT NRC TEST RESULT (Noise Reduction Coefficient Test)

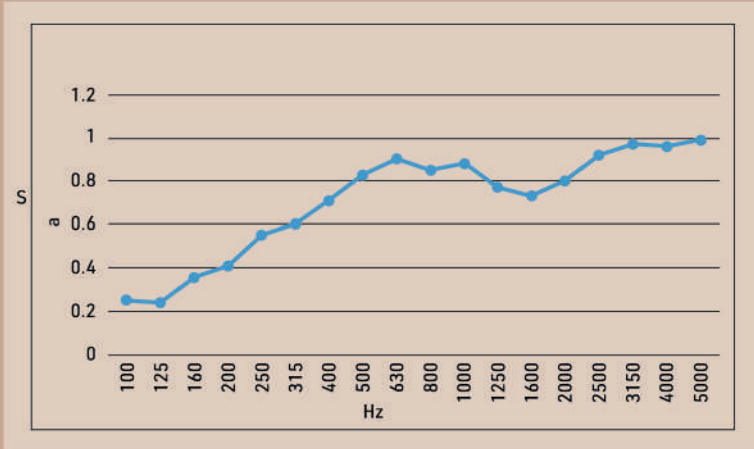

NRC (Noise Reduction Coefficient Test) 0.75

Flame Spread index 26-75 Class B

Smoke-Developed index 0-450 Class B

**ACOUSTIC FELT FSI 30 RESULT - ASTM E84-2021** standard test method used to assess the surface burning characteristics of a material used for interior wall and ceiling finishes, with results measured by Flame Spread Index (SFI)

